




Product Size

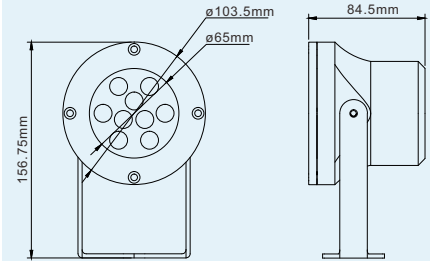

Specification

Model No.:	RS-UW27W316X-B(88136) / RS-UW24W316X-B(88136)
Front cover & Housing:	Stainless steel 316L
Dimensions:	D103.5*H166mm(Max.)
Tempered Glass:	8mm thickness
LED chip:	CREE
LED Q'ty:	9pcs 3W LED/ 6pcs 4in1 LED
Cable gland:	Stainless steel 316L PG13.5
Driver:	Constant current driver
Lens:	Bead
Beam Angle Options:	10° 30° 45° 60° 80°
Power Cable:	AWG 5/18 or AWG 3/18 SOW rubber cable
Protection Class:	IP68
Environment:	Dry / Submerged
Mounting Hardware:	Surface Mounted System
Net Weight:	2.7kgs with 1.5m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88136.093.01	2700-3000K	9*3	V+/V-	AC/DC12-24	2250 / 1125	27	1260
88136.093.02	4000-4500K	9*3	V+/V-	AC/DC12-24	2250 / 1125	27	1330
88136.093.03	5000-5500K	9*3	V+/V-	AC/DC12-24	2250 / 1125	27	1395
88136.093.04	6000-6500K	9*3	V+/V-	AC/DC12-24	2250 / 1125	27	1395
88136.093.05	Red	9*3	V+/V-	AC/DC12-24	1500 / 750	18	315
88136.093.06	Green	9*3	V+/V-	AC/DC12-24	2250 / 1125	27	810
88136.093.07	Blue	9*3	V+/V-	AC/DC12-24	2250 / 1125	27	360
88136.093.08	Yellow	9*3	V+/V-	AC/DC12-24	2250 / 1125	27	855
88136.093.09	RGB-DMX512 (3 channel)	9*3	V+ /V-/D+/D-/GND	AC/DC12-24	R: 500 / 250 B: 750 / 375 G: 750 / 375	R: 6 G: 9 B: 9	R: 105 G: 270 B: 120
88136.093.10	Auto changing color	9*3	V+/V-	AC12-24	R: 500 / 250 B: 750 / 375 G: 750 / 375	R: 6 G: 9 B: 9	R: 105 G: 270 B: 120
88136.093.11	RGBV+ (build-in CC driver)	9*3	R/G/B/V+	DC12-24	R: 500 / 250 B: 750 / 375 G: 750 / 375	R: 6 G: 9 B: 9	R: 105 G: 270 B: 120
88136.064.14	RGBW-DMX512 (4 channel)	6*4in1	V+ /V-/D+/D-/GND	DC24	R: 250 G: 250 B: 250 W: 250	R: 6 G: 6 B: 6 W: 6	R: 150 G: 360 B: 180 W: 540

