




Product Size

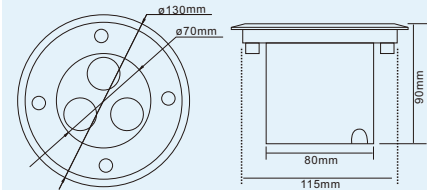

Specification

Model No.:	RS-UG3W-PM[88228]
Front cover & Housing:	304 Stainless steel+Aluminum body+Plastic installation box
Dimensions:	D130*H90mm
Tempered Glass:	8mm thickness
LED chip:	Cree / Epistar
LED Q'ty:	3pcs 1W LED
Cable gland:	Nickel plated brass PG9
Driver:	Constant current driver
Lens:	Clear, Bead, Frosted
Beam Angle Options:	10° 30° 45° 60° 90°
Power Cable:	2*1.0mm ² / 3*0.75mm ² / 4*0.75mm ² / 2*1.0mm ² +3*0.75mm ² VDE rubber cable
Protection Class:	IP67
Environment:	Dry
Mounting Hardware:	Embedded System
Net Weight:	1kgs with 1m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88228.031.01	2700-3000K	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-17	3	270
88228.031.02	4000-4500K	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-17	3	285
88228.031.03	5000-5500K	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-17	3	300
88228.031.04	6000-6500K	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-17	3	300
88228.031.05	Red	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-17	3	75
88228.031.06	Green	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-17	3	180
88228.031.07	Blue	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-17	3	90
88228.031.08	Yellow	3*1	V+/V- or L/N/G	AC/DC12-24, AC90-230	250 / 125 / 13-17	3	210
88228.031.09	RGB-DMX512 (3 channel)	3*1	V+/V- /D+/D-/GND	AC/DC12-24	R: 83 / 41 B: 83 / 41 G: 83 / 41	R: 1 G: 1 B: 1	R: 25 G: 60 B: 30
88228.031.10	Auto changing color	3*1	V+/V-	AC12-24	R: 83 / 41 B: 83 / 41 G: 83 / 41	R: 1 G: 1 B: 1	R: 25 G: 60 B: 30
88228.031.12	RGBV+ (build-in CC driver)	3*1	R/G/B/V+	DC12-24	R: 83 / 41 B: 83 / 41 G: 83 / 41	R: 1 G: 1 B: 1	R: 25 G: 60 B: 30

