




Product Size

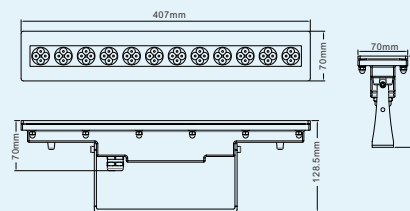

Specification

Model No.:	RS-UW60W316X-L[88455]
Front cover & Housing:	Stainless steel 316L
Dimensions:	L407*W70*H128.5mm[Max.]
Tempered Glass:	8mm thickness
LED chip:	Cree
LED Q'ty:	36pcs 3W LED / 48pcs 3W LED
Cable gland:	Stainless steel 316L PG13.5
Driver:	Constant current driver
Lens:	Clear, Bead
Beam Angle Options:	10° 30° 60°
Power Cable:	AWG 5/18 or AWG 3/18 SOW rubber cable
Protection Class:	IP68
Environment:	Dry / Submerged
Mounting Hardware:	Surface Mounted System
Net Weight:	4.0kgs with 1.5m cable
Lifetime:	>50000H

Order information

Item code	Color	Light source(w)	Line Way	Input Voltage (v)	Operating current (mA)	Consumption (w)	Luminous (lm)
88455.363.01	2700-3000K	36*3	V+/V-	AC/DC24	1875	45	3600
88455.363.02	4000-4500K	36*3	V+/V-	AC/DC24	1875	45	3960
88455.363.03	5000-5500K	36*3	V+/V-	AC/DC24	1875	45	4320
88455.363.04	6000-6500K	36*3	V+/V-	AC/DC24	1875	45	4320
88455.363.05	Red	36*3	V+/V-	AC/DC24	1500	36	1260
88455.363.06	Green	36*3	V+/V-	AC/DC24	1875	45	2880
88455.363.07	Blue	36*3	V+/V-	AC/DC24	1875	45	1080
88455.363.08	Yellow	36*3	V+/V-	AC/DC24	1875	45	2880
88455.363.09	RGB-DMX512 (3 channel)	36*3	V+ /V-/D+/D-/GND	AC/DC24	R: 625 B:625 G:625	R: 15 B:15 G:15	R: 650 B:450 G:900
88455.363.11	Auto changing color	36*3	V+/V-	AC24	R: 625 B:625 G:625	R: 15 B:15 G:15	R: 650 B:450 G:900
88455.363.13	RGBV+ (build-in CC driver)	36*3	R/G/B/V+	DC24	R: 625 B:625 G:625	R: 15 B:15 G:15	R: 650 B:450 G:900
88455.483.14	RGBW-DMX512 (4 channel)	48*3	V+ /V-/D+/D-/GND	AC/DC24	R: 625 B:625 G:625 W:625	R: 15 B:15 G:15 W:15	R: 650 B:450 G:900 W:1050

